


Maximum Performance Service Brakes Features

- Formed Steel Pressure Cap
- Corrosion Resistance e-Coating Standard
- Formed Steel Non-Pressure Chamber
- Heavy - Duty Nylon Reinforced Diaphragm
- Top and Side Air Ports - 3/8" NPTF
- Center Hole Shield

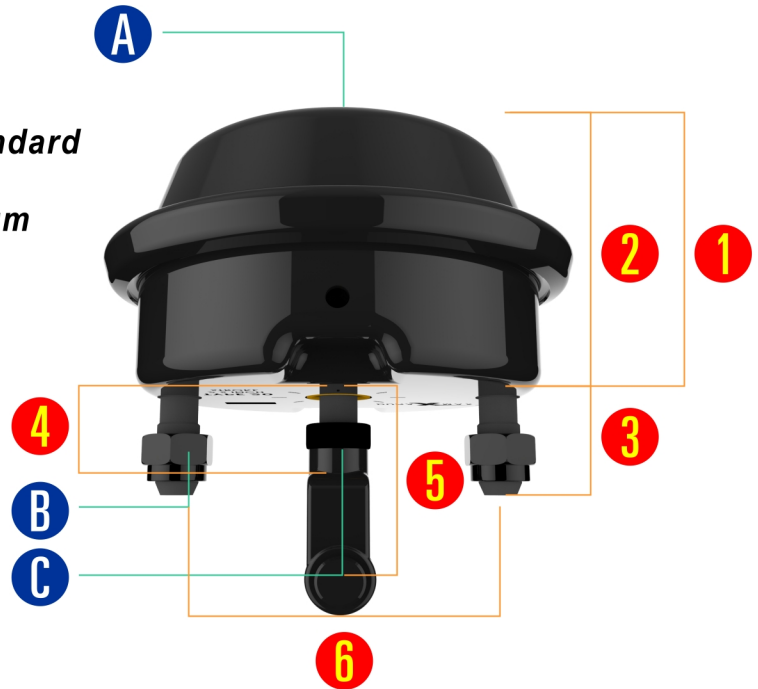

CLASSIFY	DMS20D	DMS24D	DMS24E	DMS30D
SIZE	20	24	24	30
STROKE	2.5" (63.5mm)	2.5" (63.5mm)	3" (76.2mm)	2.5" (63.5mm)
Wt. lb (kg)	6.92 lb (3.14kg)	8 lb (3.65kg)	8.8 lb (4kg)	10.1 lb (4.6kg)
1	4.39"/111.5mm	4.65"/118mm	5.12"/130mm	4.83"/122.7mm
2	3.66 ± 0.12" 93 ± 3mm	4.02 ± 0.12" 102 ± 3mm	4.50 ± 0.12" 114.5 ± 3mm	4.21 ± 0.12" 107 ± 3mm
3	1.54 ± 0.05" 39 ± 3mm	1.54 ± 0.05" 39 ± 3mm	1.54 ± 0.05" 39 ± 3mm	1.54 ± 0.05" 39 ± 3mm
4	1.45 ± 0.12" 37 ± 3mm	1.41 ± 0.12" 37 ± 3mm	1.45 ± 0.12" 37 ± 3mm	1.41 ± 0.12" 37 ± 3mm
5	2.68 ± 0.12" 68 ± 3mm	2.68 ± 0.12" 68 ± 3mm	2.68 ± 0.12" 68 ± 3mm	2.68 ± 0.12" 68 ± 3mm
6	4.75 ± 0.06" 120.65 ± 1.5mm	4.75 ± 0.06" 120.65 ± 1.5mm	4.75 ± 0.04" 120.7 ± 1mm	4.75 ± 0.06" 120.65 ± 1.5mm
A (PORT)	3/8-18NPTF	3/8-18NPTF	M16X1.5	3/8-18NPTF
B (MTG BOLT)	M16X1.5	M16X1.5	M16X1.5	M16X1.5
C (P/ROD)	M16X1.5	M16X1.5	M16X1.5	M16X1.5